



**KARNATAKA ANTIBIOTICS &
PHARMACEUTICALS LIMITED**

(A Government of India Enterprise)

ENQUIRY REF. No.	K-E&P/SR/1624/2024-25
DATE	23.10.2024
DUE DATE	31.10.2024 till 1:00 PM

Dear Sir,

Please submit your lowest and competitive offer in a SEALED ENVELOPE, DULY SUPERSCRIBING OUR ABOVE ENQUIRY REF. NO., DATE and DUE DATE on it. Mentioned other details of F.O.R terms, Taxes, Credit period, Delivery offered, Name of the Make, Detailed Specification etc., for the below Supply or Service

Sl No	Item Code	Item Description	Uom	Qty
01	---	CONVERTING OLD STICKER LABEL ROOM TO SEMI-FINISHED ROOM DPP1 PRODUCTION DETAILS AS PER BOQ & DRAWING ENCLOSED	NO.	01

Please ensure that your offer reaches us on or before Due Date by courier OR Speed post or by Hand in sealed cover only to below office address:

*M/s. Karnataka Antibiotics and Pharmaceuticals Limited
Plot No.37, Arka The Business Centre,NTTF Main Road, Peenya Industrial Area
2nd Phase, Bengaluru-560058 Ph. No.080-23571590*

NOTE:

01. PLEASE VISIT OUR SITE FOR BETTER UNDERSTANDING THE SCOPE OF WORK
02. IF YOU ARE NOT PARTICIPATING IN THE TENDER PLEASE SEND A REGRET LETTER.
03. VENDOR HAS TO QUOTE AS PER OUR TENDER IN YOUR COMPANY LETTER HEAD.
04. QUOTATION MUST BE SUBMITTED IN TWO SEALED COVERS (TECHNICAL & COMMERCIAL BID) SEPARATELY AND TO BE PLACED IN ONE ENVELOPE OR ELSE YOUR PROPOSAL WILL NOT BE CONSIDERED.

IF YOU NEED ANY CLARIFICATION, PLEASE CONTACT US.

Thanking you,

Yours faithfully,
For KARNATAKA ANTIBIOTICS
& PHARMACEUTICALS LIMITED

RAMESHA.B
ASST. GENERAL MANAGER(MATERIALS)

KARNATAKA ANTIBIOTICS AND PHARMACEUTICALS LTD, PEENYA
BOQ for Converting old sticker lable room to semifinished room DPP1 production

SI No	Description	Unit	Quantity	Rate	Amount
1	Removal of block masonry/concrete/sheet removing /door/window including cleaning and clearing of debris etc., complete as per specifications & as per directions of Engineer-in-charge.	Lots	1.00		
2	Construction of 150mm Solid Block Masonry in CM 1:6, the rate should including cost of materials, labour, curing complete as per specifications and as per directions of Engineer-in-charge.	Sft	140.00		
3	Providing 15 mm cement plaster of mix 1:4 (1 cement: 4 fine sand) including rounding off corners wherever required smooth rendering, providing and removing scaffolding, including cost of materials, labour, curing complete as per specifications and as per directions of	Sft	250.00		
4	Providing & fixing 45 mm thick GI flush door with frame having 1.2 mm GI sheet and rock wool sandwiched sheet, shutter of 1.0 mm thick GI sheet including 5 mm thick toughened glass both(double) and all fittings, door closure, handle, lock & key, SS kick plate (1000 mm height) fixtures and hardwares, removing existing door shutter & frame etc., complete. (Colour of Door is blue) Door size : 2100 mm X 1600 mm , Refer attached drawing .	Nos	1.00		
5	Finishing walls with Smooth interior Enamle paint with Silicone additives of required shade: New work (Two or more coats applied @ 1.43 ltr/10 sqm over and including priming coat of interior primer applied @ 2.20 kg/10 sqm) , Wall putty to be considered	Sqm	120.00		
7	Patch Epoxy flore & Epoxy coving				
(A)	The existing covings shall be levelled with resin topping fine sanded and finished with two coats of Polyurethane Paint/Highsolid Epoxy Coating.				
(B)	Preparing the surfce and eliminating the total dust so as to obtain a sound surface. Creating anchor cuts on the feather ends and applying Epoxy primer and allowing it to set. Laying 2mm thick self leveling Epoxy floor match with existing flore	Lots	1.00		
TOTAL AMOUNT					
GST					
GRAND TOTAL AMOUNT					

Note:-

- 1) Before quoting, Contractor has to visit the site to understand the scope of the work
- 2) Contractor should include all supply & labour charges
- 3) Safety norms to be taken care by Contractor only
- 4) Billing will be made on actual measurement at site
- 5) Debris to be shifted outside the factory premises
- 6) Scaffolding to be included in Contractor's scope
- 7) Electrical wall conduit chasing to be included in Contractor's scope



(Signature)

Notes


on leave

(Signature)

DPP 1 Semi - finished door

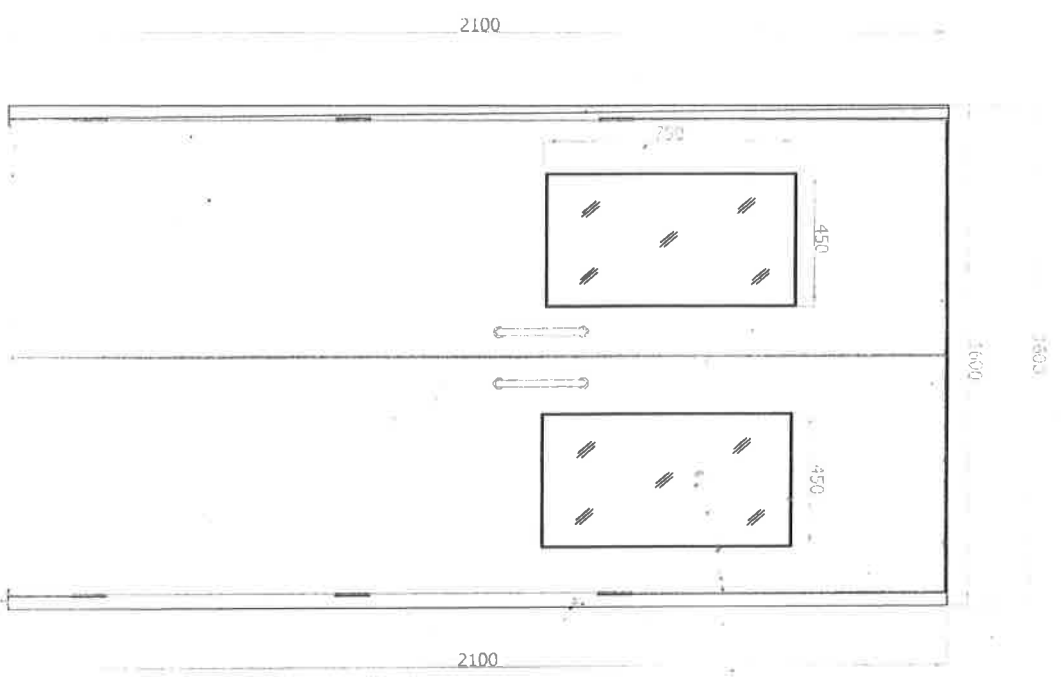

- 1. FRAME - 12mm THK GI POWDER COATED
- 2. LEAF - 45mm WIDTH 0.6mm THK GI POWDER COATED
- 3. LOCK - Dorma
- 4. VIEW GLASS - 5mm THK
- 5. DOOR OPENING - LH PULL
- 6. SIZE - 1600mm (W) X 2100mm(H) X 80mm
- 7. ALL FITTINGS MAKE: DORMA

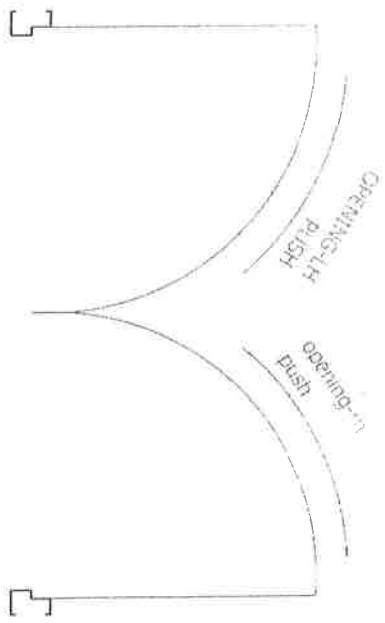

Handwritten signature
 36 (GHE) Eluvines

Handwritten signature
 Dm (MCM)

Handwritten signature
 SMC (GEC)

Handwritten signature
 28/03/24
 SMC (GEC)